


2. Multi-active satellite

Build wohnort as a multi-active satellite

In the source modeler, tag the wohnort object with the satellite signature and make it multi-active.

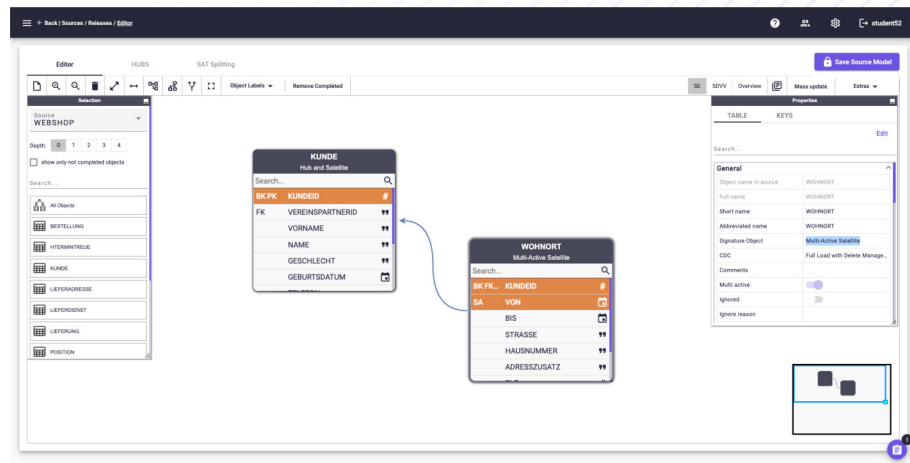

Build wohnort as a multi-active satellite

In the source modeler, tag the wohnort object with the satellite signature and make it multi-active. Then you can set the VON attribute as the subsequence attribute. That is all you need to do to load the dataset correctly to the raw vault.