


3. Identifying relationship and driving keys

Bestellungen and Positions are both modeled as hubs in this case

They are connected through a link:

LNK_POSITION_BESTELLUNG

In case of M:N links, VaultSpeed can set a driving key, but here it is not needed as the standard link with a satlink between both hubs will capture the relation correctly.

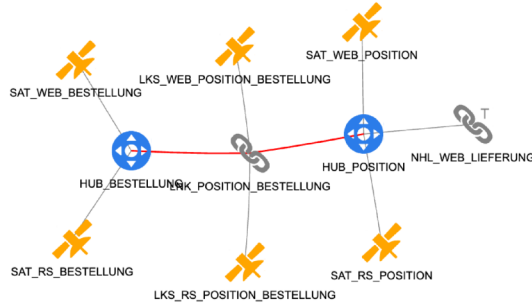

Bestellungen and Positions are both modeled as hubs in this case. They are connected through a link: **LNK_POSITION_BESTELLUNG**. That link is defined by drawing the relation between both hubs. This is easy to do using drag and drop in VaultSpeed's source editor.